


25 year
power output
warranty
M200W

Technical Paramerers

Engineering Drawings
▼(Front Side)

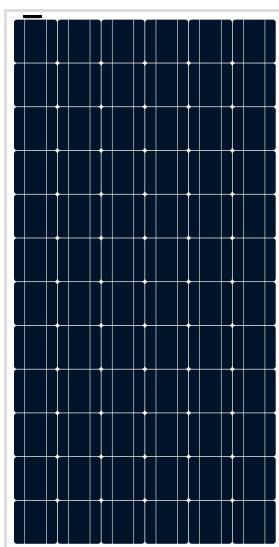

Engineering Drawings
▼(Back side)



Electric Parameters

Model RJ200M5-72

Rated Maximum Power	200W
Power Tolerance	0~+5W
Cell efficiency	18.4%
Maximum Power Voltage(Vmp)	19.49V
Maximum Power Current(Imp)	10.26A
Open Circuit Voltage(Voc)	23.24V
Short Circuit Current (Isc)	10.75A

Mechanical Parameters

Dimensions	1580*808*35mm
Weight	15.0kg
Cell Technology	MONO 125*125/6*12
Glass	3.2mm Tempered Glass
Encapsulation	EVA
Backplane	Multilayer Composite
Aluminum-franme	Silvery Anodized Aluminium Alloy
Junction-BOX	IP65/IP67
Cable	4mm ² ; 900mm
Connector	MC4 and MC4 Compatible

Performance Parameters

Maximum System Voltage	DC1000V
Maximum Series Fuse Rating	15A
Operating Temperature	-45~+80°C
Temperature Coefficient of Isc	+0.06%
Temperature Coefficient of Voc	-0.32%
Temperature Coefficient of Pmp	-0.45%
Maximum Load(Wind/SNOW)	2400Pa/5400Pa
Applications Class	Class A

Package Parameters

Package Configuration	1pcs/CTN
Package Dimensions	1595*50*823mm
Package Gross weight	17.2kg

STC:irradiance 1000W/m², Cell Temperature 25°C, Spectrum AM:1.5

10-years 90% of Min. rated owtpu power, and 25-years 80% of Min. rated output power warranty